

Pneumatic Nailer Type R 90-845 C

The BeA 845 C is a compact but powerful tool. The tool drives full round strip nails with diameter 2,8 to 3,8mm in the lengths of 50 to 90 mm. The comfortable rubber grip and the attached exhaust make the tool operator friendly.



Popular applications:

Roofing, framing, truss building, sheathing, sub-flooring, fencing, pallets, crate assembling, cable drums...

Length: 545 mm
Width: 130 mm
Height: 369 mm

Technical data

Type description:	R 90-845 C
Article code:	12000470
Magazine type :	Top loader
Safety:	Contact actuation
Fastener type:	R 20 strip nails
Magazine capacity:	approx. 70
Fasteners per strip:	2 x 35
Operating pressure:	5 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	2.2 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 84 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 91 dB
Weight:	3.6 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 4.3 m/s²

Extras supplied with the nailer: Operating instructions, spare parts list, service instructions, silencer, single actuation set. Tool case included.

Subject to technical modifications.

Accessories:

Article code	Description
14407208	Nailer hanging

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)


Pneumatic Nailer Type R 90-845 C



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0)4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Full round strip nails R20

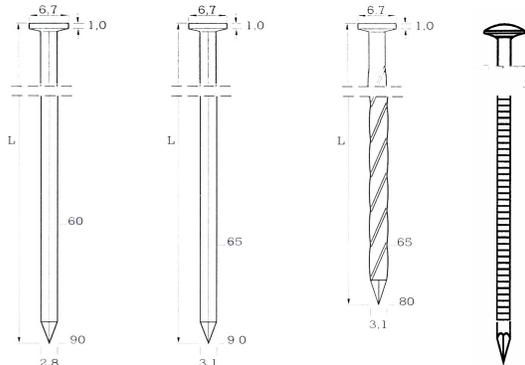

Nail shank: Ø 2.8 to 3.4 mm
Length: 50 to 90 mm

Description	L = Length mm
R20 2.8 x 60 BK	60
R20 2.8 x 65 BK	65
R20 2.8 x 80 BK	80

R20 3.1 x 65 BK	65
R20 3.1 x 70 BK	70
R20 3.1 x 80 BK	80
R20 3.1 x 90 BK	90

R20 3.1/3.4 x 70 BK Screw	70
R20 3.1/3.4 x 80 BK Screw	80
R20 3.1/3.4 x 90 BK Screw	90

R20 2.8 x 65 NK	65
R20 2.8 x 70 NK	70
R20 3.1 x 80 NK	80
R20 3.1 x 90 NK	90

R20 2.8 x 65 NR Ring Lens head*	65
R20 3.1 x 80 NR Ring Lens head*	80

Other lengths and finishes are also available on request.

* Nails are certified to DIN 1052 Part 2

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut